



NOTES:

1. DISCONNECT AND REMOVE POWER OUTLETS, EXIT SIGNS, LIGHTS, OCCUPANCY SENSORS, AND LIGHT SWITCHES, AS NOTED ON ELECTRICAL DEMOLITION PLAN. REMOVE WIRING AND CONDUIT. PULL BACK WIRING TO NEAREST JUNCTION BOX, AND COIL UP. MAKE SAFE. EXISTING WIRING AND CIRCUIT TO BE REUSED, UNLESS OTHERWISE NOTED.
2. DISCONNECT AND REMOVE DATA OUTLETS AS NOTED ON ELECTRICAL DEMOLITION PLAN. REMOVE WIRING AND CONDUIT. PULL BACK WIRING TO AVOID IMPACT OF CONSTRUCTION, AND COIL UP. MAKE SAFE. EXISTING WIRING TO BE REUSED, UNLESS OTHERWISE NOTED.
3. DISCONNECT AND REMOVE PULL STATIONS, HEAT DETECTORS, AND STROBE DETECTORS AS NOTED ON ELECTRICAL DEMOLITION PLAN. REMOVE WIRING AND CONDUIT. PULL BACK WIRING TO AVOID IMPACT OF CONSTRUCTION, AND COIL UP. MAKE SAFE. EXISTING DEVICE AND EXISTING CONNECTIONS TO BE REUSED, UNLESS OTHERWISE NOTED.
4. DISCONNECT AND REMOVE CARD READERS AS NOTED ON ELECTRICAL DEMOLITION PLAN. REMOVE WIRING AND CONDUIT. PULL BACK WIRING TO AVOID IMPACT OF CONSTRUCTION, AND COIL UP. MAKE SAFE. EXISTING DEVICE AND EXISTING CONNECTIONS TO BE REUSED, UNLESS OTHERWISE NOTED. COORDINATE WITH CORPORATE SECURITY BEFORE DISCONNECTING AND RELOCATING SECURITY DEVICES. ONBOARD SECURITY CONSULTANT AT THE BEGINNING OF CONSTRUCTION.

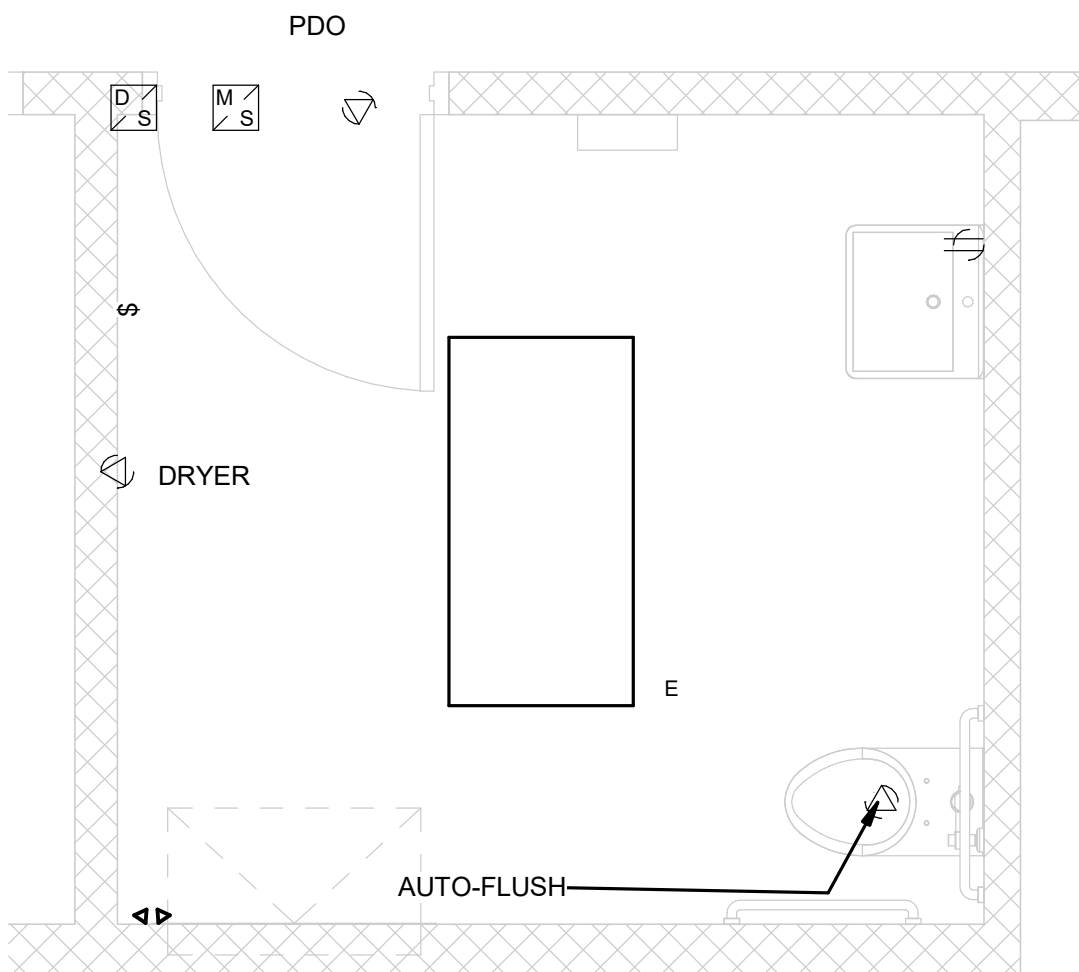


2 ELECTRICAL DEMOLITION PLAN 1ST FLOOR - BFWR

Scale: 1 : 25

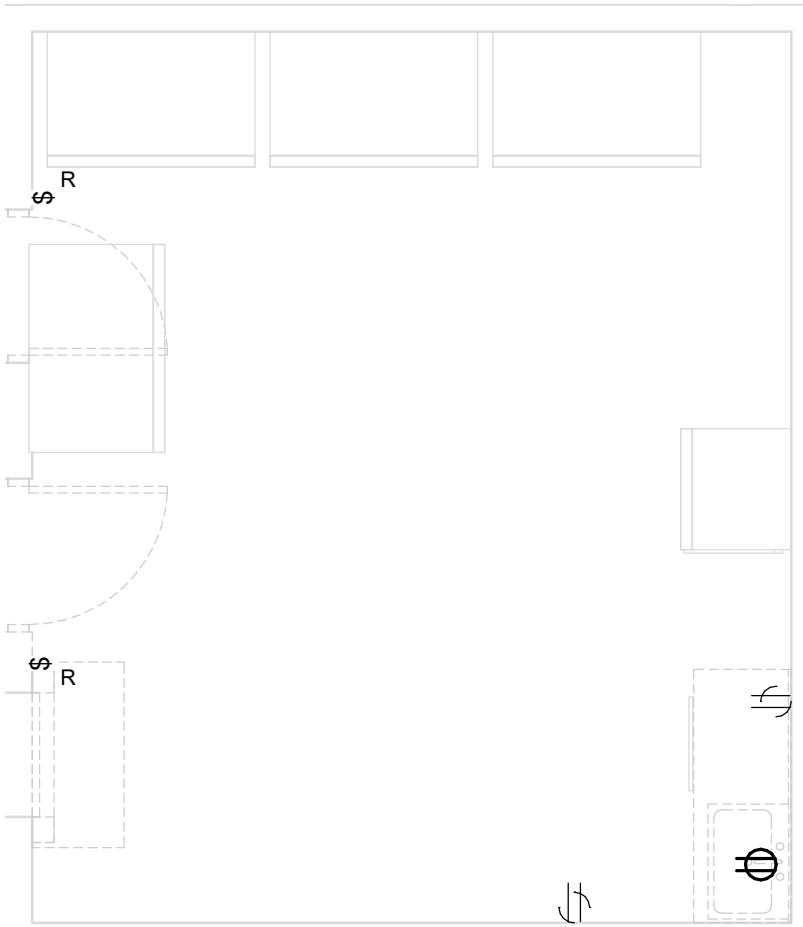


3 ELECTRICAL DEMOLITION PLAN 1ST FLOOR - KITCHEN

Scale: 1 : 50

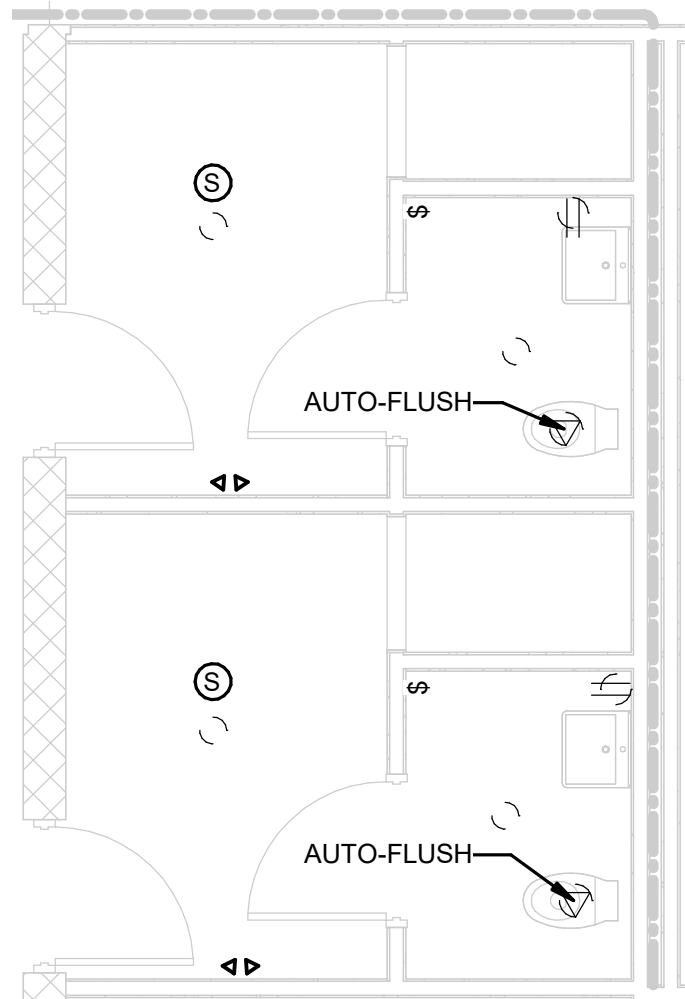

6 ELECTRICAL DEMOLITION PLAN 1ST FLOOR - CHANGEROOMS

Scale: 1 : 50

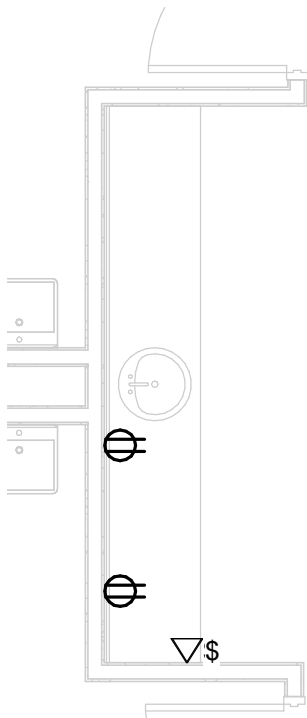

5 ELECTRICAL DEMOLITION PLAN 1ST FLOOR - SINK

Scale: 1 : 50

CLIENT

CITY OF TORONTO
Corporate Real Estate Management
Project Management Office
Metro Hall Toronto, ON
M5V 3C6

COPYRIGHT

This drawing has been prepared solely for the intended use, and any reproduction or distribution for any purpose other than authorized by IBI Group is forbidden. Written dimensions shall have precedence over scaled dimensions. Contractors shall verify and be responsible for all dimensions and conditions on the job, and IBI Group shall be informed of any variations from the dimensions and conditions shown on the drawing. Shop drawings shall be submitted to IBI Group for general conformance before proceeding with fabrication.

IBI Group Professional Services (Canada) Inc.
is a member of the IBI Group of companies

ISSUES

No.	DESCRIPTION	DATE
A	50% SUBMISSION	2022-05-11
B	90% SUBMISSION	2022-08-15
C	BUILDING PERMIT	2022-08-15
D	ISSUED FOR TENDER	2022-10-03
E	ADDENDUM #5	2023-09-22

CONSULTANTS

SEAL

PRIME CONSULTANT

IBI GROUP
175 Galaxy Blvd, Unit 100
Toronto, ON M9W 0C9, Canada
tel 416 679 1930 fax 416 675 4620
ibigroup.com

PROJECT TITLE

CITY OF TORONTO
ACCESSIBILITY UPGRADES

PROJECT ADDRESS

BOYS & GIRLS CLUB OF
EAST SCARBOROUGH
100 GALLOWAY RD

PROJECT NO:

122260

DRAWN BY:

A. FEDIW

CHECKED BY:

M. BOJIC

PROJECT MGR:

APPROVED BY:

P. WILLIAMS

SHEET TITLE

ELECTRICAL
DEMOLITION PLAN 1ST
FLOOR

SHEET NUMBER

G01-002-E1101

ISSUE

E