



Addendum No. 04

Revisions and Related Responses to Questions & Addenda items # 1 & 2

For RFT2024-01PR

Question 1:

Operable Partition Spec - Can you please clarify?

- 1) Specs call for vinly hinges which are not standard for this door type. Typically we see metal hinges on this type. Can you please confirm?
- 2) Spec calls for 950,000 -cycle test which would require specialty testing. This number seems extremely high, can you please confirm?

Answer 1:

Please refer to Section 10652 – 2.5.1:

- 1) Revised hinge type from vinyl to steel.
- 2) Delete requirement for 950,000-cycle test.

Question 2:

Specifications call for Roof Hatch guardrail to be by Babcock Davis, however spec 10 99 92 calls for Skyline Hatch barrier 5004. Can you please clarify?

Answer 2:

The hatch itself is by Babcock Davis, the guard rail is the Skyline Group product.
Please refer to Section 10999 – Item 2.2.1 and Item 2.2.2.

Question 3:

Please advise any base building trade we need to carry including Sprinkler, Fire alarm, Security.

Answer 3:

- 1) Sprinkler: there is not a base building sprinkler contractor designated. General contractors must use a qualified sprinkler contractor to perform the sprinkler modification work.
- 2) Fire alarm: Refer to Section 28 31 25 Item 3.3.1 for fire alarm contractor requirements.
- 3) Security: Modifications, as needed, to the existing security systems are to be coordinated with Owner's security company (ies) during construction.

Question 4:

Can you please clarify requirements and locations for Protective Suspended Nylon Netting?

Answer 4:

Please see below memo- Addenda Item # 1- "Arena Protective Suspended Nylon Netting"

Date: April 19, 2024

No. of Pages: 2

Project: ECC & Arena Renovations

Project No.: TE-43036-23

Address: 14 Boland Drive, Erin, ON

Permit No.: n/a

Client: Town of Erin

Purpose:

To clarify the scope of work related to arena's protective suspended nylon netting.

Clarification:


1. Delete 10999, item 3.2.4.2. of the specification.
 - a. Revised the scope to replace all existing arena netting.
2. Remove all existing netting, ceiling and vertical.
3. Replace all vertical netting at the end zones.
4. Provide new ceiling netting over the entire ice surface.

Sample existing photographs for information:

Ceiling netting



Ceiling netting

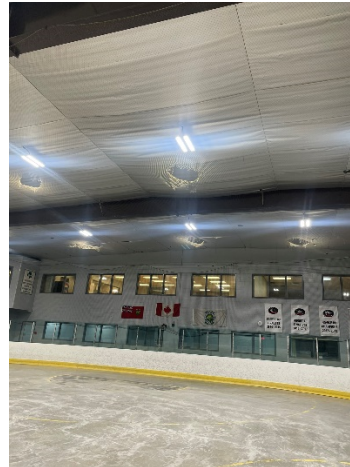

Ceiling/Vertical netting



Ceiling/Vertical netting



Ceiling/Vertical netting



Ceiling/Vertical netting



End of memo.

Addenda item # 2 Fire Alarm Equipment List Revision

Please find below addenda item # 2 from the electrical consultant.

This memo is to remove **Simplex** from the approved equipment list for the new fire alarm system

- Section 28 31 25 'Fire Alarm System (Addressable)' Part 2 - 2.25

Addenda Item # 2



55 Northland Rd.
Waterloo, ON N2V 1Y8 | Tel: 519-725-3555
www.deiassociates.ca

April 18, 2024

Client: Tacoma Engineers Inc.
570 Bryne Drive
Barrie, ON L4N 9P6

RE: Erin Community Centre - Renovation
Erin, ON

Job #: 22181

Attn: Aaron Maksym

ADDENDUM 01

MECHANICAL

Item 1

1.0 No mechanical content.

ELECTRICAL

Item 1

1.0 Reference Specification Section 28 31 25 'Fire Alarm System (Addressable)'
.1 In Item 2.25, 'Approved Equipment', remove Simplex from the approved equipment list.

A handwritten signature in blue ink, appearing to read 'Stephen Dematier', is written over a light blue horizontal line.

Stephen Dematier
Lead Designer, Partner
22181 Addendum 01 (E-Fire Alarm Mfg Remove) Apr 18 24
sdd/sd

c.c. D + H Architects Inc., Christopher Ferguson/Mark Hicks