



110 Drewry Avenue
Toronto (Ontario) M2M 1C8
Tel.: 416-397-6564 or 1-800-274-3764

Addendum #2

RFQ 2025-26

General Contractor Services for Interior Renovations

at ÉÉC Sainte-Croix, Tiny

Closing Date: March 26, 2025 at 2:00 PM local time

This Addendum forms part of the Contract Documents and amends the original Bids Documents and Specifications as noted below.

Ensure all parties submitting bids are aware of all items included in this Addendum.

Acknowledge receipt of this Addendum by inserting its number on the Bid Form. Failure to do so may subject bidder to disqualification.

PART I – QUESTION AND ANSWER

Question 1: Can you confirm it is room 127 for Addendum 1? If so, could we get the dimensions needed for the base?

Answer 1: Please note there was a typo in Addendum #1. The correct room number is **122**, not 127.

PART II – ENCLOSED DOCUMENT

The following document is enclosed within addendum #2 and is hereby incorporated as an integral component of RFQ 2025-26:

- **24-34 - Revised Addendum #1 - Amra J Architect**

END OF ADDENDUM 2

Addendum No. **1-R1**

Project No.: 24-34

Date: 2025/03/20

Project: *CLIENT: Conseil Scolaire Catholique*

PROJECT TITLE: EEC Sainte – Croix Interior Renovations

The following information supplements and/or supersedes the bid documents issued on February 25, 2025.

This Addendum forms part of the contract documents and is to be read, interpreted, and coordinated with all other parts. The cost of all contained herein is to be included in the contract sum. The following revisions supersede the information contained in the original drawings and specifications issued for the above-named project to the extent referenced and shall become part thereof. Acknowledge receipt of this Addendum by inserting its number and date on the Tender Form. Failure to do so may subject the bidder to disqualification.


1. INTENT

- 1.1. This Addendum is issued prior to receipt of Bid to provide clarifications and revisions to the Drawings and Specifications. The following additional instructions shall apply to and govern the Bid Documents.

2. ARCHITECTURAL DRAWINGS

2.1. DRAWING A2.00 – DEMOLITION & KEY PLAN

- a. Classrooms 123 & 122
- REMOVE existing p-lam window sill behind ex. Mechanical Units.
 - REMOVE existing wall base throughout entire classrooms 123 & 122 and first two rows of the VCT below removed blackboards/millwork

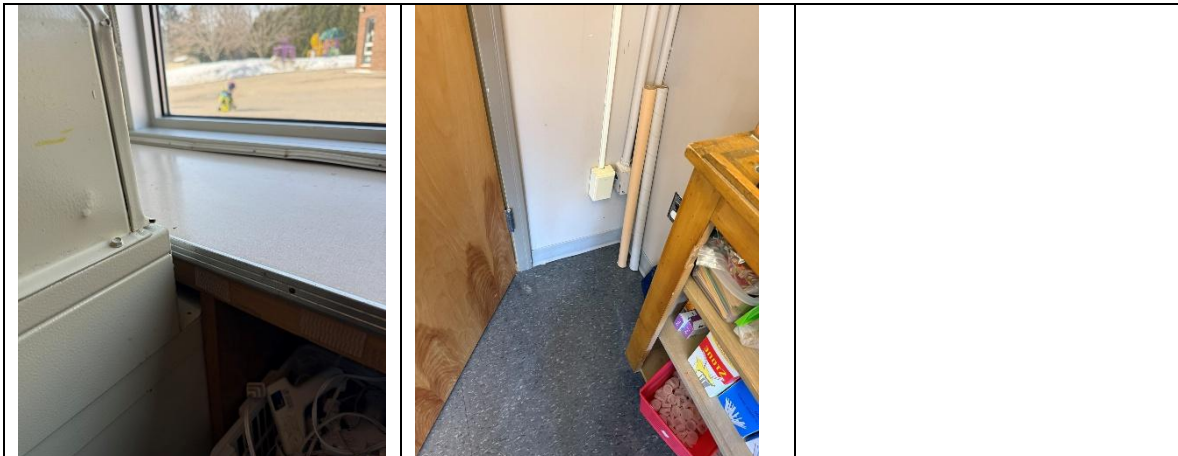

2.2. DRAWING A2.01 – FLOOR PLANS

a. Classrooms 123 & 122

- At removed flooring, install new VCT Flooring, Tarket VCT II, colour to match existing. Wall base to be rubber, 100 mm high.
- Extend new millwork top surface / window sill behind existing mechanical units.

END OF ADDENDUM NO 1-R1